



# SUREFOOT

*HARDSCAPE PRODUCTS INC.*



**WE WILL ROCK YOU!**



## How we began?

It started out as a  
simple idea.

Over the years, as installers and working with various types of paver edgings, we worked on improving and developing a design for paver edging that has an ELEVATED snip/cut brace that's off the ground.

This design proves to save time when installing, eliminating the need to pre-measure and pre-cut allowing the installer to cut from above.

**AND THAT'S HOW SUREFOOT**



**EDGING WAS BORN!**

# WE WILL ROCK YOU!

## CONTENTS

|                                      |    |
|--------------------------------------|----|
| Surefoot Paver Edging                | 4  |
| Sureflex Paver Edging                | 6  |
| Aluminum Paver Edging                | 8  |
| Aluminum Paver Edging - Low Profile  | 10 |
| Plastic Garden Edging                | 11 |
| Rockstar Garden Edging XS            | 12 |
| Rockstar Garden Edging               | 13 |
| Rockstar Garden Edging Back in Black | 14 |
| Xtreme Bond                          | 15 |
| Vertigrip / Foam-A-Grip              | 16 |
| Geogrid / The Wedgie                 | 17 |
| Waldo - Wall Drain Pro               | 18 |
| German Hammers                       | 19 |
| Lifting Equipment                    | 20 |
| Splitters                            | 21 |
| Accessories & Tools                  | 22 |
| Lite On                              | 24 |
| Paver Spot                           | 25 |
| Slim Shady / Cyclops                 | 26 |
| EZLites                              | 27 |



## DESIGNED BY INSTALLERS, FOR INSTALLERS!

- What the professionals use and easy for the "Do-it-yourself-er" to install.
- Integrated connection system - ideal for **green** roofs - no spikes or clips required.
- Heavy duty construction: will not become brittle to weathering and lasts a lifetime.
- Comes in straight form but can easily be worked with for curved applications
- Ideal for garden beds, landscape beds, brick/stone patios, tree rings, and walkways.
- Made from 100% recycled material and comes with karma! ♻️
- Super permeable to promote proper root growth and drainage which eliminates turf brown out.







**"CUT ON THE GO"  
DESIGN.**



**ALLOWS EDGING TO  
BE CUT FOR CURVED  
APPLICATIONS.**




**WITHOUT  
PRE-CUTTING OR  
HAVING TO LIFT EDGING  
OFF THE GROUND.**




**CROSS SPIKE  
TECHNOLOGY MAKES THE  
EDGING MORE RESISTANT  
TO HEAVING UP FROM  
GROUND FROST.**



**SPIKES CAN GO  
ANYWHERE IN BETWEEN  
THE CUT BRACE AND  
EDGING WALL. WHICH  
HELPS TO DIMINISH  
EDGE PULL AWAY WHEN  
INSTALLING.**



**SUPER FAST BUILT IN  
CONNECTION SYSTEM.  
NO CLIPS NEEDED AND  
HELPS TO SAVE LABOUR  
TIME.**

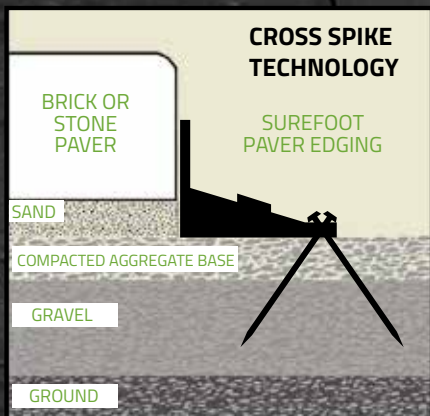

#### **INSTALLATION TIPS:**

##### **Driveways:**

Nail every 8" (20.3 cm) to 12" (30.5 cm).

For curved areas you can also double spike.

##### **Walkways and Patios:**

Nail every 12" (30.5 cm) to 20" (50.8 cm).

For curved areas you can also double spike.

##### **SPECS:**

8' length x 1"5/8 height


3" depth x 2.25" width

243.84cm length x 4 cm height

7.68 cm depth x 5.71cm width



## FLEXIBLE PAVER EDGING

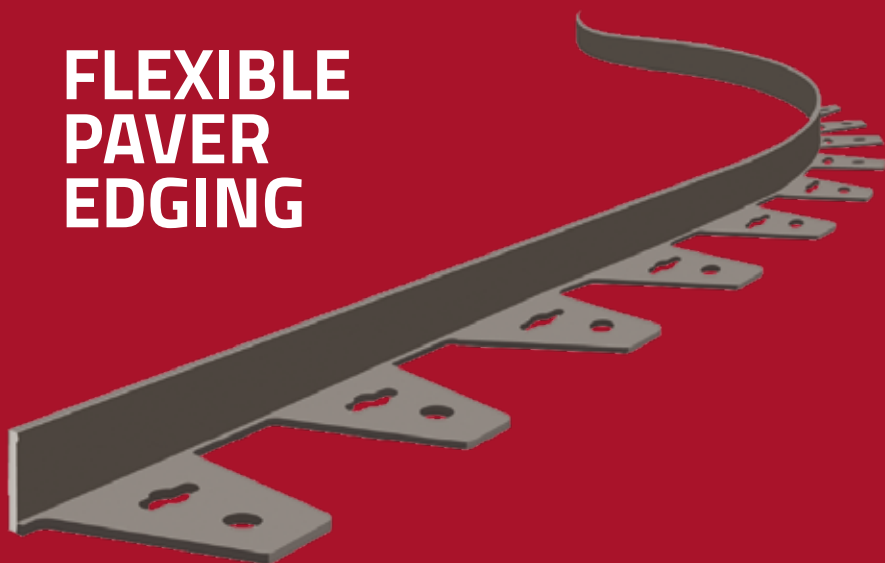

- Easy installation.
- Save time - No cutting required for curves.
- Ideal for driveways, patios, and walkways.
- Made from 100% Recycled material and comes with Karma! ♻️

### STANDARD INSTALLATION

BRICK OR  
STONE  
PAVER

SUREFOOT  
PAVER EDGING

SAND

COMPACTED AGGREGATE BASE

GRAVEL

GROUND

### REVERSIBLE INSTALLATION

BRICK OR  
STONE  
PAVER

SUREFOOT  
PAVER EDGING

SAND

COMPACTED AGGREGATE BASE

GRAVEL

GROUND

### INSTALLATION TIPS:

#### Driveways:

Nail every 8" (20.3 cm) to  
12" (30.5 cm).

Use Standard Installation Only.

#### Walkways and Patios:

Nail every 16" (40.6 cm) to  
20" (50.8 cm) & at either end.

Use Standard or Reversible  
installation.

### SPECS:

**Length:** 7'-6" (228.6 cm)


**Height:** 1.625" (4.1275 cm)

**Thickness:** .31" (7.874 mm)




# LUMINUM PAVER RESTRAINTS

- What the professionals use and easy for the “Do-it-yourself-er” to install.
- Heavy duty construction: will not become brittle to weathering and lasts a lifetime.
- Comes in straight form but can easily be worked with for curved applications/corners.
  - Tool-less to do curves, corners or straights.
- Can be installed both standard or reverse installation.
- Low profile so the edge is invisible when properly installed.
  - No wasted material due to overlap at joints.
    - Comes with plated joiner tabs.
  - Made from 100% recycled material and comes with karma!♻️

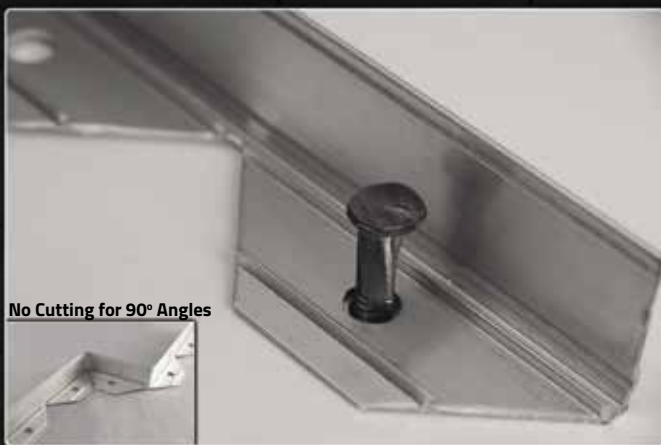



### STANDARD INSTALLATION

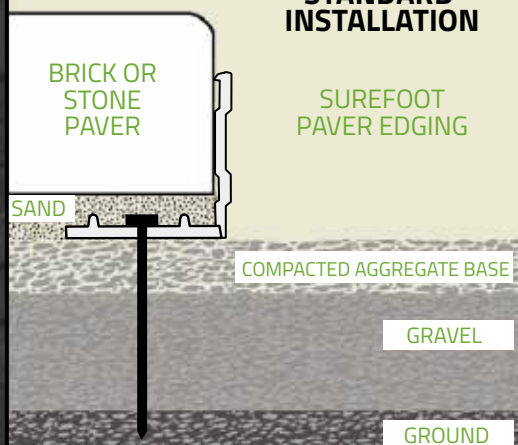

### INSTALLATION TIPS:

#### Driveways:

Nail every 8" (20.3 cm) to 12" (30.5 cm).


Use Standard Installation Only.

#### Walkways and Patios:

Nail every 16" (40.6 cm) to 20" (50.8 cm) & at either end.

Use Standard or Reversible installation.

### REVERSIBLE INSTALLATION

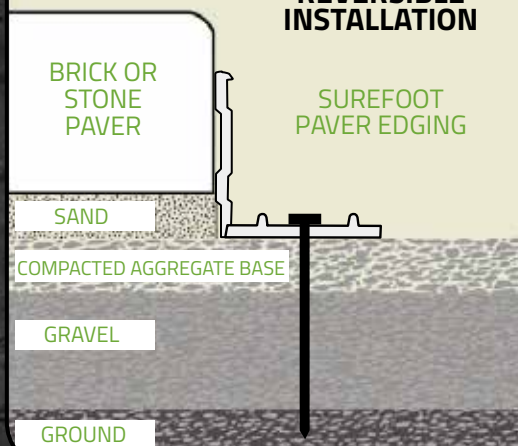


### SPECS:

**Length:** 8'-4" (254 cm)

**Height:** 1.5" (3.81 cm)

**Thickness:** .125" (3.175 mm)



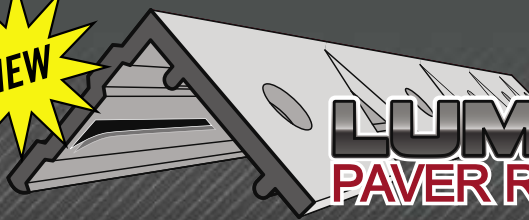

## LOW PROFILE ALUMINUM PAVER RESTRAINTS

Our Lowest Profile Aluminum Edging is ideal for use with 20mm porcelain pavers, flagstone, wetcast shapes and bluestone. Our aluminum edging bends to your needs no matter how complex your design requirements. Made of aluminum, it's strong enough for straight lines, yet flexible enough to follow the most intricate curved patterns.

- Convenient 8' lengths
- Made of non-rusting Aluminum
- Completely hidden from view
- One piece for straight or curved patterns
- 90 degree angles without cutting
- Will not warp in heat or crack in cold
- No loss of material due to overlap at joints
- 100% Recycled Material & comes with Karma! ♻️

**Length: 8' (2.44m)**  
**Height: 5/8" (17mm)**  
**Thickness: 0.125" (3.2mm)**  
**Flange: 1.5" x 4" (35mm x 102mm)**  
**Alloy: 6063 aluminum**  
**T-5 hardness**  
**US Patent**



# PROFESSIONAL GRADE GARDEN EDGE

**CONTRACTORS  
CHOICE**

100% RECYCLED MATERIAL & COMES WITH KARMA! ♻️

## PLATINUM EDGE




Durable corrugated side wall construction with **T-Shape** flange allows for easy and secure installation.



**\*NOTE - CONNECTORS ARE REQUIRED**

## PRIMO EDGE




**Primo Edge** was developed to offer quality and performance at an economical price.



**\*NOTE - CONNECTORS ARE REQUIRED**

## SIMPLE EDGE



Patented design eliminates the need of a garden edger. It's one time installation inhibits grass from growing onto walkways and concrete driveways, making this product Eco friendly and a true time saver.



### Anchor Stakes

9" x 1"

Galvanized Steel  
100 pcs per case



### Straight Connector

6"

100 pcs per case



### 90° Corner Connector

Durable Injection Mold  
25 pcs per case





# ROCK/STAR<sup>TM</sup>

*Garden Edge*

XTRA



STRENGTH

- **Keyhole Interlocking System:** Lengths are easily and quickly connected.
- **Superior Reinforcement** – 8ft lengths: Rigid enough to provide perfectly straight lines; flexible enough for the most demanding curves.
- **No need to use heavier gauge or more costly material** to maintain straight runs.
- **Heavy duty 1 1/8" nail loops** located every 23": allows for more frequent nailing positions, providing superior anchoring where required.
- **Steel Nail Anchoring:** Spiral 10" nails readily available.
- **100% Recycled Material & comes with Karma!** ♻️




Specs:  
Length: 8ft (2.43m)  
Height: 4" (10.1cm)  
Thickness: 1/8" (3.2mm)

# ROCK/STAR

*Garden Edge*

## Rock Star 4" Professional Garden Edge

- Ideal for both commercial and residential use
- EZ-Connect System - saves labour time
- Heavy Duty/Beefy Edge so straight lines are easy
- Flexible to allow for perfect curves

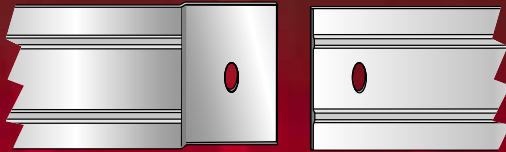

Specs:  
Length: 8ft (2.43m)  
Height: 4" (10.1cm)  
Thickness: 1/8" (3.2mm)

## Premium Quality

- Forget Plastic "Rolled" Big Box Edges
- 8ft Lengths - bigger sizes do not stay straight
- For Garden Beds, Tree Rings, Walkways, Patios
- 100% Recycled Material & comes with Karma! ♻️
- Non rusting Aluminum





# ROCK STAR

*Garden Edge*

## BACK IN BLACK

### Rock Star 4" Professional Garden Edge

- Ideal for both commercial and residential use
- EZ-Connect System - saves labour time
- Heavy Duty/Beefy Edge so straight lines are easy
- Flexible to allow for perfect curves

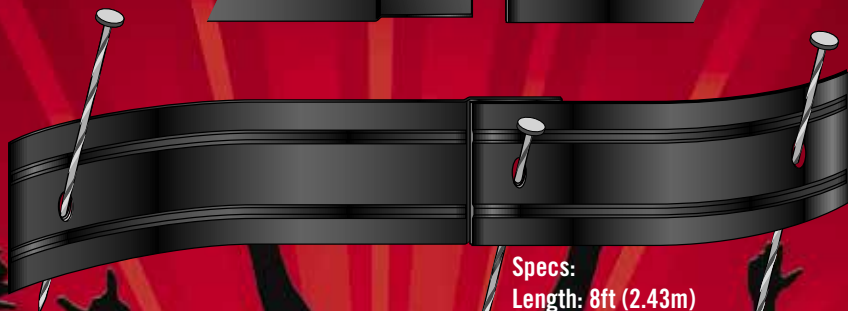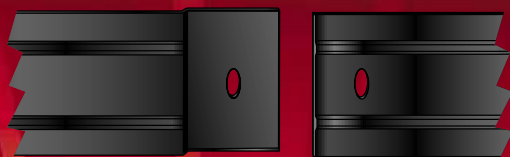

#### Specs:

Length: 8ft (2.43m)

Height: 4" (10.1cm)

Thickness: 1/8" (3.2mm)

### Premium Quality

- Forget Plastic "Rolled" Big Box Edges
- 8ft Lengths - bigger sizes do not stay straight
- For Garden Beds, Tree Rings, Walkways, Patios
- 100% Recycled Material & comes with Karma! ♻️
- Non rusting Aluminum
- Durable black anodized finish

# Extra Strength Adhesive

## Premium Polyurethane

Why compete with the big box stores? We can give you your own exclusive brand.



"The Choice of Professionals"



### **Xtreme Bond Extra Strength Adhesive.**

**Premium Polyurethane** for concrete and stone is guaranteed to satisfy the highest of demands. We specially formulated our adhesive to **adhere to wet or frozen surfaces**. Can be used on a variety of surfaces including concrete, brick, wood, metal, stone and fibreglass. Extreme bond is formulated to work in all temperatures. **Quick adhesion and fast drying. VOC Compliant.**

**10.5 oz.** Tubes 24 per case  
Pallet 60 cases 1440 tubes

**29 oz.** Tubes 12 per case  
Pallet 60 cases 720 tubes



# VERTIGRIP

DESIGNED FOR VERTICAL APPLICATIONS

Vertigrip is a single-component, non-sag, hybrid elastomeric adhesive/sealant that is designed to bond a variety of substrates.

With its high green strength, Vertigrip can be used on virtually any interior or exterior application including subfloor assembly, interior drywall installation, landscaping bricks/blocks, natural stone, mirrors, crown moldings, and PVC molded extrusions.

## FEATURES:

- Extremely strong bonding with excellent adhesion to most substrates
- Low VOC and solvent-free for virtually no odor and no restrictions on application
- Excellent green strength provides instant grab
- Elongation of +350%
- Can be applied at low temperature or in adverse weather conditions




# FOAM-A-GRIP



Foam-A-Grip is a high quality adhesive based on modified polyurethane chemistry. It has been developed for use in commercial construction including subfloor assembly, interior drywall installation, SIPS panels, rigid foam insulation, EIFS systems, faux brick/blocks and natural stone. This adhesive has excellent long-term resistance to weathering, water, acids and solvents.

## FEATURES:

- 3 times stronger than typical construction adhesives
- A single 24-ounce can does the job of 6 to 10, 28-ounce tubes of other adhesives, reducing cost and waste
- 20-minute set time
- Aggressive adhesion for general construction and landscaping applications
- Low-temperature application
- Excellent adhesion to a wide range of substrates




1 CAN = APPROXIMATELY  
6 LARGE TUBES OF 825ML  
CONSTRUCTION ADHESIVE  
(1/2" BEAD)

# GEOGRID

## RETAINING WALL SYSTEM

- ❑ Retaining Walls, Steep Slopes, Timber Walls, Paver Reinforcement, Landscape Repair
- ❑ Recommended For Wall Heights up to 6'
- ❑ Biaxial - CMD 882 lbs / ft
- ❑ LTDS - MD 822 lbs / ft
- ❑ 12 Rolls - 4 ft x 50 ft / "Pop Off Top" Display
- ❑ Other Sizes:
  - Geo Grid 150 - 6' x 150 Roll - 45 lbs - 100 SQ. YDS
  - Geo Grid 200 - 6' x 300 Roll - 110 lbs - 200 SQ. YDS
  - Geo Grid 350 - 6' x 300 Roll - 130 lbs - 200 SQ. YDS

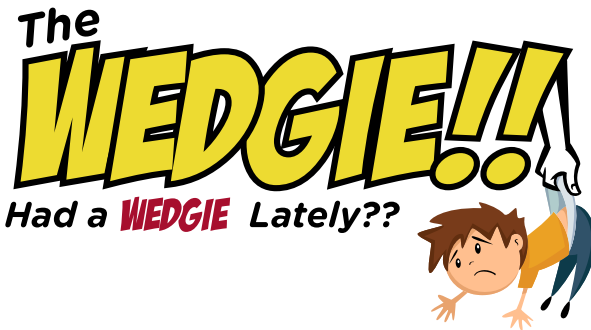

- ❑ Load bearing up to 8,000 psi
- ❑ Weatherproof and will not rot, shrink, warp or split
- ❑ Easy break off points, amazing support and easy way to align
- ❑ UV treated so it will not become brittle
- ❑ Recommended for pavers, retaining wall caps, masonry, concrete and many other uses
- ❑ Injection molded into sheets of 10


360 PCS PER CASE (21LBS)



**Designed for all  
3" - 8" blocks.**



- Easy installation
- Esthetically pleasing
- Reduced labour costs / No more cutting holes
- Height easily modified for use with any size block or timber
- Male end snaps into 4" TEE
- Case pack - 12 pcs
- Available in Grey or Beige

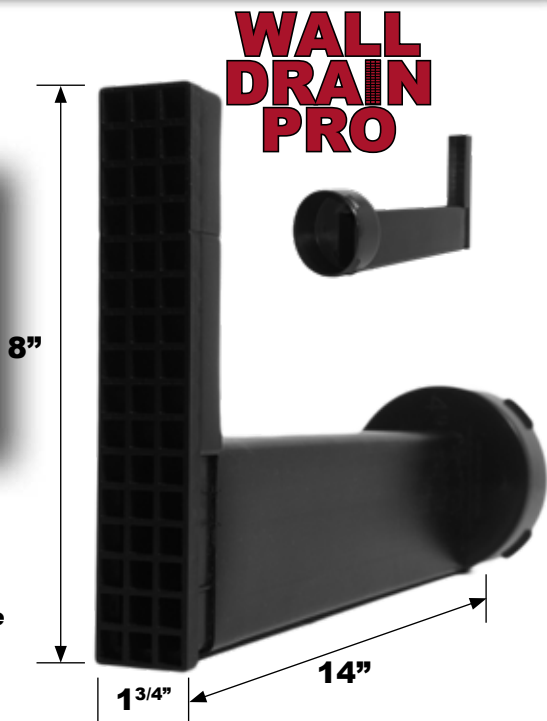

**BLACK:** SWD-BL  
**GREY:** SWD-GR  
**BEIGE:** SWD-BE

**AVOID  
UNSIGHTLY  
DRAINS**





GET **HAMMERED** WITH



**MADE  
IN  
GERMANY**

## ALL HAMMERS CARRY A LIFETIME WARRANTY!!

### Baseplex Paver Mallet STH-417

The Universal Hammer

- Ash Wood Handle
- Zinc Die Cast Head
- 2" (50mm) Changeable Inserts
- Overall Length - 13.25"

#### Inserts included:

STH-417A: White - Nylon/Hard  
STH-417B: Red - Plastic/Hard



**3.2 Lbs**

### Paver Mallet STH-416

Perfect for Large Wall Projects

- 13" Hickory Wood Handle
- Cast Iron Head Casting
- 2<sup>3/8</sup>" (60mm) Changeable Inserts
- Overall Length - 16"

#### Inserts included:

STH-416A: Black - Composite Rubber/Medium Hard  
STH-416B: Red - Plastic/Hard



**3.5 Lbs**

### Wall Paver Mallet STH-419

Ideal for Retaining Wall Cap/Stones

- 19" Hickory Wood Handle
- Cast Iron Head Casting
- 3<sup>1/8</sup>" (80mm) Changeable Inserts
- Overall Length - 19.25"

#### Inserts included:

STH-419A: Black - Composite Rubber/Medium Hard  
STH-419B: White - Nylon/Hard



**6.6 Lbs**

### Sledge Mallet STH-418

The Ultimate Sledge Mallet

- 31" Hickory Wood Handle
- 7lb Cast Iron Head Casting
- 3<sup>1/8</sup>" (80mm) Changeable Inserts
- Overall Length - 31.4"

#### Inserts included:

STH-418A: Black - Composite Rubber/Medium Hard  
STH-418B: White - Superplastic/Medium Hard



**7.4 Lbs**

### Dead Blow 40mm: STH-420 70mm: STH-421

The Only Dead Blow to use

- Hickory Wood Handle
- Two white nylon changeable inserts
- Overall Length - 4" (40mm) 4.5" (70mm)

#### Inserts included:

STH-420A: White - Nylon/Hard  
STH-421A: White - Nylon/Hard



**5.5 Lbs**

**1.6 Lbs**



# SUREFOOT

## HARDSCAPE PRODUCTS INC.

### LIFTING EQUIPMENT



#### Sections Clamp

With the versatile lifting range of 9"-42" and a safe working load of 1600 lbs., this clamp is capable of picking up 1-2 sections of pavers at a time. The 1002 is perfect for separating cubes of pavers and handling materials on site. Fork Yoke Attachment available. Made in Canada.



#### Jed Clamp It/ Tread/Curb Clamp

|       |                   |          |
|-------|-------------------|----------|
| J900  | 4"-22" max width  | 900 lbs  |
| J2400 | 8"-32" max width  | 2400 lbs |
| J3000 | 12"-42" max width | 3000 lbs |



|       | Capacity | Rise  | Depth   |
|-------|----------|-------|---------|
| T600  | 600 lbs  | 6"-8" | 12"-25" |
| T1200 | 1200 lbs | 6"-8" | 20"-35" |

#### Tread Setter

Eliminate finger smashing, back breaking, time consuming and work-related injuries using the new TREADSETTER. The Treadsetter is designed to handle various step treads from 12"-35" in depth – up to 4" in width and with a 6"-8" rise. This new product is easily adjusted to tread width and balance. The tool has pivot-style urethane ends to reduce slippage and protect the stone, as well as servicing other applications in various weather conditions. Ideal for Rosetta Stone.



#### Montolit Curb Clamp

Mechanical or hand-lifter. 3.15"-7" 440lb capacity



#### STH-424 Curb Lifter

Adjustable 1/2" - 10"  
Weight - 10 lbs

#### STH-425 2 Man Curb Lifter

Adjustable 19.5" - 43"  
Weight - 25 lbs  
Detachable for Skid Steer/Bobcat



## Paver Cart



Lifts a complete band of pavers at one time. Saves time, money and labour. Less handling reduces chipping and breaking of materials and speeds up installation.

### FEATURES:

- Large pneumatic turf-profile tires • solid steel pallet roller
- Handle assembly detaches for easy transport
- Reinforced cross-braced handles prevent twisting
- Foot bar for increased leverage
- Can be used for both palletized/unpalletized materials
- Shipping weight: 165 lbs. • Overall dimensions: 40" x 21" x 69"
- Safe Lifting Load: 600 • Width adjusts from 34"-40"



### BK43 Paver Splitter

STH-422

Blade cutting length 13"  
Cuts from 0" - 4.33"  
Weight 62 lbs.



MADE  
IN  
ITALY

NEW



### 6L Paver Cutter STH-423

- Designed and constructed specifically for splitting pavers and retaining wall block
- Lightweight and easy to transport, yet heavy duty quality
- Quick and efficient way to get the job done
- Will cut up to a 3.9" paving stone

### SPECS:

CUT WIDTH: 12.2"  
CUTTING HEIGHT: 0 - 3.9"  
WEIGHT: 66LBS

### Hydraulic Block/Wall Cutter STH-3ST

The big one! For the contractor who has special needs. Ideal for flagstone and retaining walls. The 3ST will cut any block, paving tile, slab or similar material made from concrete, stone, or granite.

Cutting width: 24"  
Cutting height: 3.35"-9.25"  
Weight: 242 lbs.  
Pressure Capacity: 25 tons





# SUREFOOT

**HARDSCAPE PRODUCTS INC.**

## ACCESSORIES AND TOOLS



### SF 3300

Fixed hardened galvanized knife, 4 edges  
 Cutting Width 13"  
 Cutting Height 1/2" - 6" - Concrete Pavers  
 Weight - 80 lbs  
 2 spindles to adjust height  
 Holding plate  
 Spring Loaded Cut



### SF 4300

Fixed hardened galvanized knife, 4 edges  
 Cutting Width 17"  
 Cutting Height 1/2" - 13" - Sand Lime Stone  
 Cutting Height 1/2" - 6" - Concrete Pavers  
 Weight - 125 lbs  
 2 spindles to adjust height  
 Holding plate  
 Spring Loaded Cut

## EZYSCREED



***Now Available in  
USA!***

### SIZES:

1.2M - 3ft 11"

1.8M - 5ft 10"

2.4M - 7ft 10"

Good for screeding sand or concrete.  
 Clamp/Handle set-up is fully reversible  
 giving you 2 screeds in 1.  
 Designed screeding edge for cleaner  
 finish on your job.  
 The handle gives you better leverage  
 for screeding larger loads.  
 Made from high tensile aluminum, so  
 it resists bending.



### Aluminum SSR-210 Screed Rail



Lightweight 1" x 8'  
 0.25" Diameter

### Aluminum SSR-211 Screed Bar



4'  
 Super Light 6'  
 Hollow 1" x 4" 8'

**Chisels**

Ideal for Brick - Case of 12

**SCL-211** 3"

**SCL-212** 4"



**STG-241 Economy Knit**

Rubber/Latex Coated Palm

Available by the Dozen.

XL Only

Case of 30



**STH-411 Deluxe Paver Persuader**

Galvanized steel handle

Weight - 8 lbs



**SPB-311**

Paver Extractor

Adjustable 4" - 10"

**SPB-312**

Paver Aligning Bar

**SPB-313**

Paver Lifter Small

from 0"-21"

**SPB-314**

Heavy Duty Paver Lifter

from 16"-27"



**Caulking Guns**

Heavy Duty Construction

**STC-221** 9" Case Pack 24

**STC-222** 13" Case Pack 12



**Stiff Bristle / Exterior Broom**

**SLB-18** 18"

**SLB-24** 24"



**Landscaping / Grading Rake**

**SLR-30** 30"

**SLR-36** 36"

**SLR-42** 42"

**SLR-48** 48"



**ADJUSTABLE (FINISHING) ALUMINUM SAND SCREED**



**STH-413 Sledge Hammer**

7 lbs.



**STH-414 Dead Blow**

4 lbs.

Case of 12



**STH-415 Rubber Mallet**

32 oz.


Case of 24





# LITE ON

## RETAINING WALL LIGHT

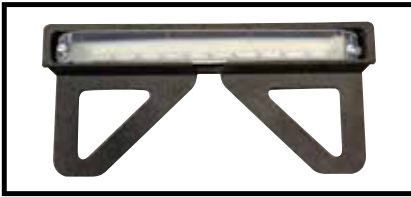

*BOTTOM*



*FRONT*

## FEATURES

20,000 Hour Lifespan

Energy Efficient - 1.9 Power Watt That Emits “Warm” Light

30 SMD High Output LED’s Per Fixture

5 Year Warranty (When Used With Approved DC Transformer)

Waterproof Design - 1P66 Rating\*

UV Treated Polycarbonate Lens - Will Not Brown Or Yellow

Quick And Easy Installation - Comes With 6ft Lead Wire

30 Year Warranty On Corrosion Resistant Powder Coated Finish

Heavy Duty Die Cast Aluminum Body

## DIMENSIONS

7<sup>1/4</sup>” Wide x 3/4” Tall x 1” Deep

Available Colors:



•Bronze Sparkle



•Matte Black



•Classic Brown



# PAVER SPOT



## PAVER SPOT

- Waterproof and submersible
  - Energy efficient and emits a “warm” light with a durable polycarbonate shell
  - Suitable for driveways, walkways, steps, decks, docks and more
  - 10 year warranty, 100,000 hour rated
    - 1.5 Watts, 1” Diameter, Height 5/8”, 6ft lead wire
- Available in 4 spot packs or complete kit (contains 8 spots, 60 Watt Transformer, Timer, Gel Caps)

## DC TRANSFORMERS

- 36, 60, 100 watt versions
- DC specific constant even power supply
- 3 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated

## AC TRANSFORMERS

- 60 and 100 watt versions
- 5 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated
- Built in photocell / timer

## PHOTOCELL TIMER

- Indoor or Outdoor use
- Multiple time on/off settings
- 1 yr warranty
- Photo activated for hassle free on/off

## LOW VOLTAGE WIRE

- Outdoor Rated, UL approved

16 Gauge Wire - 100 ft rolls - Suitable for runs over 75 ft

18 Gauge Wire - 100 ft rolls - Suitable for runs under 75 ft

## OUTDOOR GEL WIRE NUTS

- UL approved
- 10 per pack

**CREE** 





# SUREFOOT

HARDSCAPE PRODUCTS INC.

## SLIM SHADY

### RETAINING WALL LIGHT



- 6 led x 20 lm per led = 120 lumen
- Wattage 2.4W
- Warm White: 2725  $\pm$  70 °K
- Wire length: 1.5 m (4' 11")
- cETL
- 12V AC/DC
- Fully assembled units available in Black and Grey
- Dimensions - 6<sup>7/8"</sup> wide x 3/4" tall x 1" deep



## CYCLOPS

### PAVER LIGHT



- Voltage 12V AC/DC
- Wattage 0.4W
- # of LEDs 6
- Beam degree 90°
- Frosted Lens
- Brushed Nickel metal trim
- Color Temperature : 2725  $\pm$  70 °K
- Dimensions Ø1.25 x H.73in (Ø30.5x H18.5mm)
- Lumens 25
- IP Rating 66 - Indoor/Outdoor
- Certification cETLus





**EZL050**


## High Power, Adjustable Accent Light

- **Includes: 17W, 1100 lumens, 3000K**
- Power can be dialed down to 3W, 250 lumens
- 20° to 60° adjustable beamspread
- Humidity evacuation system
- IP65
- Includes a 12" aluminum spike
- Louver included
- Rugged brass construction
- **5 Year warranty**


**12" Spike**




### Adjustable Beamspread

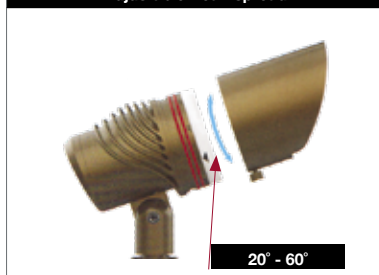

### Adjustable Power

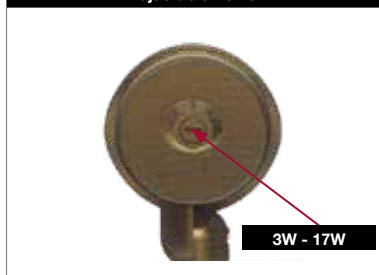

### Humidity Evacuation

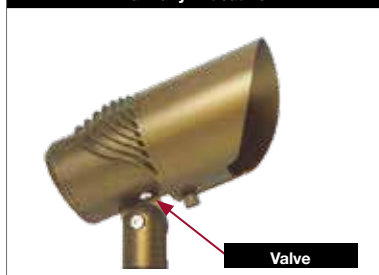



MR16



- Sturdy brass MR16 accent light
- Angled glare shield length adjustable from 130 mm to 155 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- Stake included
- **Lamp not included. See page 28 for a selection of MR16.**
- **5 year warranty**

MR08



- Sturdy brass MR08 accent light
- Angled glare shield length adjustable from 80 mm to 110 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- Stake included
- **Lamp not included. See page 28 for a selection of MR08.**
- **5 year warranty**

Bi-pin Flood




- Sturdy brass mini flood
- 2.5W, 3000°K, **LED bi-pin already installed in the fixture**
- G4 socket
- Stake Included

EZL103AB

EZL102AB

EZL104AB





24"

7"




BBK

- Sturdy brass construction
- 2.5W, 3000°K, LED bi-pin already installed in the fixture
- Stake included
- 5 year warranty


EZL106AB

EZL106BBK



21"

5.25"



BBK

- Sturdy brass construction
- 2.5W, 3000°K, LED bi-pin already installed in the fixture
- Stake included
- 5 year warranty

EZL105AB

EZL105BBK



125 mm  
4.9"

95 mm  
2.17"




BK

- MR16 aluminum accent light
- Angled Glare Shield
- Stake Included
- Lamp not included. See page 28 for a selection of MR16.
- 5 year warranty

EZL101BZ

EZL101BK



EZL901AB - 2" Riser

EZL902AB - 7" Riser

EZL903AB - 12" Riser

EZL904AB - 18" Riser

- 5 year warranty

12" Spike



Aluminum Mounting Bracket



EZL905BZ

- 5 year warranty



75W Model

#### Transformer : 75W


- 75W Transformer
- Sturdy stainless steel built
- Output taps: 12 and 15 Volts
- Built-in mechanical timer and photocell plug
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- Thermal protection with auto-reset on the primary side
- Secondary side magnetic circuit breaker
- Drop down bottom
- **10 year warranty**



150W Model

#### Transformer : 150W, 300W & 600W

- Sturdy stainless steel built
- Output taps: 12, 13, 14 and 15 Volts
- Timer and photocell plugs
- Room for most commonly used timers
- Removable, lockable hinged door
- Large, robust terminal block
- Drop down bottom
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- Thermal protection with auto-reset on the primary side and secondary side magnetic circuit breaker
- Multiple knockouts
- **10 year warranty**



| Part #  | Watts | Dimensions (mm) |     |     | Taps            |
|---------|-------|-----------------|-----|-----|-----------------|
|         |       | a               | b   | c   |                 |
| EZLT7a5 | 75    | 170             | 110 | 115 | 12 & 15         |
| EZLT150 | 150   | 295             | 153 | 140 | 12, 13, 14 & 15 |
| EZLT300 | 300   | 325             | 155 | 140 | 12, 13, 14 & 15 |
| EZLT600 | 600   | 365             | 170 | 170 | 12, 13, 14 & 15 |

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|

Replace: ~ 35W - Suitable for enclosed luminaires

|      |       |    |        |   |     |        |     |     |        |       |
|------|-------|----|--------|---|-----|--------|-----|-----|--------|-------|
| MR16 | GU5.3 | 12 | EZL219 | 4 | 30° | 3000°K | 310 | 80+ | 25 000 | 50 mm |
|      |       |    | EZL220 | 4 | 45° | 3000°K | 310 | 80+ | 25 000 | 50 mm |
|      |       |    | EZL221 | 4 | 60° | 3000°K | 310 | 80+ | 25 000 | 50 mm |



FC · 5 year warranty

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|

Replace: ~ 50W - Suitable for enclosed luminaires

|      |       |    |        |   |     |        |     |     |        |       |
|------|-------|----|--------|---|-----|--------|-----|-----|--------|-------|
| MR16 | GU5.3 | 12 | EZL240 | 7 | 45° | 3000°K | 475 | 80+ | 25 000 | 50 mm |
|------|-------|----|--------|---|-----|--------|-----|-----|--------|-------|



FC · 5 year warranty

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|

Replace: ~ 20W - Suitable for enclosed luminaires

|      |     |    |        |     |     |        |     |     |        |       |
|------|-----|----|--------|-----|-----|--------|-----|-----|--------|-------|
| MR08 | GU4 | 12 | EZL201 | 2.5 | 30° | 3000°K | 160 | 80+ | 25 000 | 36 mm |
|      |     |    | EZL202 | 2.5 | 80° | 3000°K | 160 | 80+ | 25 000 | 36 mm |



FC · 5 year warranty



| Louver |        |          |       |         |
|--------|--------|----------|-------|---------|
| Part # | Source | Cell Dia | Depth | Cut-Off |
| EZR16  | MR16   | 1/4"     | .235" | 45°     |

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|
|------|------|-------|-----------|-------|------------|-------|--------|-----|-----------|-----|

Replace: ~ 50W - Suitable for enclosed luminaires

|    |     |    |        |     |      |        |     |     |        |       |
|----|-----|----|--------|-----|------|--------|-----|-----|--------|-------|
| T3 | GU4 | 12 | EZL301 | 2.5 | 360° | 3000°K | 250 | 80+ | 25 000 | 32 mm |
|----|-----|----|--------|-----|------|--------|-----|-----|--------|-------|



FC · 5 year warranty

WE WILL  
ROCK YOU!



**SUREFOOT**

*HARDSCAPE PRODUCTS INC.*

1.877.442.4457 [WWW.SUREFOOTEDGING.COM](http://WWW.SUREFOOTEDGING.COM)

[INFO@SUREFOOTEDGING.COM](mailto:INFO@SUREFOOTEDGING.COM)

Follow us on:

