







We would like to thank all our dealers/contractors that believed in us, for trying our products, and working with our company. It is thanks to you that we now have dealers across North America. Yes we have grown, but we have remained true to our grass roots and are still a family run company.

Going back to our first year...we only had 3 products, a plastic paver edge, an aluminum paver edge, and spikes. We now offer a full line of products and shop the world to bring you accessories that we believe in and have tested extensively before offering them to you. Nobody should be a guinea pig in this business! Not you or your customers. Our products are tried, tested and true.

We are Surefoot Hardscape Products!





It started out as a simple idea.

Over the years, as installers and working with various types of paver edgings, we worked on improving and developing a design for paver edging that has an ELEVATED snip/cut brace that's off the ground. This design proves to save time when installing, eliminating the need to pre-measure and pre-cut allowing the installer to cut from above.

AND THAT'S HOW SUREFOOT



HARDSCAPE PRODUCTS INC.

CONTENTS

| Surefoot Paver Edging | 4 |
|--------------------------------------|-------|
| Sureflex Paver Edging | 6 |
| Aluminum Paver Edging | 8 |
| Aluminum Paver Edging - Low Profile | 10 |
| Grateful Edge | 11 |
| Rockstar Garden Edge XS | 12 |
| Rockstar Garden Edge - Back in Black | 12 |
| Xtreme Bond | 13 |
| Inverted Marking Paint / Geogrid | 14 |
| The Wedgie / Wall Drain Pro | 15 |
| Hammers | 16 |
| Accessories & Tools | 18 |
| Lifting Equipment | 20-23 |
| Splitters | 24-25 |
| Lite On | 25 |
| Paver Spot | 26 |
| Slim Shady / Cyclops | 27 |
| EZLites | 28 |




DESIGNED BY INSTALLERS, FOR INSTALLERS!

- What the professionals use and easy for the "Do-it-yourself-er" to install.
- Integrated connection system ideal for green roofs - no spikes or clips required.
- Heavy duty construction: will not become brittle to weathering and lasts a lifetime.
- Comes in straight form but can easily be worked with for curved applications
- Ideal for garden beds, landscape beds, brick/stone patios, tree rings, and walkways.
- Made from 100% recycled material and comes with karma!
- Super permeable to promote proper root growth and drainage which eliminates turf brown out.





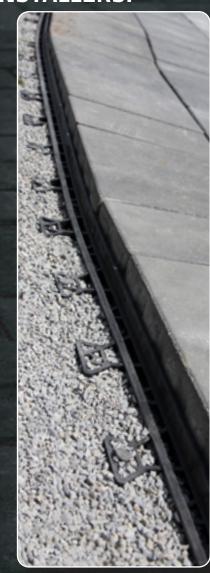





"CUT ON THE GO" DESIGN.



ALLOWS EDGING TO BE CUT FOR CURVED APPLICATIONS.



WITHOUT PRE-CUTTING OR HAVING TO LIFT EDGING OFF THE GROUND.



CROSS SPIKE TECHNOLOGY MAKES THE EDGING MORE RESISTANT TO HEAVING UP FROM GROUND FROST.



SPIKES CAN GO ANYWHERE IN BETWEEN THE CUT BRACE AND EDGING WALL WHICH HELPS TO DIMINISH EDGE PULL AWAY WHEN INSTALLING.



SUPER FAST BUILT IN CONNECTION SYSTEM. NO CLIPS NEEDED AND HELPS TO SAVE LABOUR TIME.

Super permeable to promote proper root growth and drainage which eliminates turf brown out.



INSTALLATION TIPS:

Driveways: Nail every 8" (20.3 cm) to 12" (30.5 cm). For curved areas you can also double spike.

Walkways and Patios: Nail every 12" (30.5 cm) to 20" (50.8 cm). For curved areas you can also double spike.

SPECS: 8' length x 1"5/8 height 3" depth x 2.25" width 243.84cm length x 4 cm height 7.68 cm depth x 5.71cm width





VIDEO LINK





FLEXIBLE PAVER EDGING

MORE BEEFY, HEAVY DUTY EDGING

• Easy installation.

- Save time No cutting required for curves.
- Ideal for driveways, patios, and walkways.
 - Made from 100% Recycled material and comes with Karma!

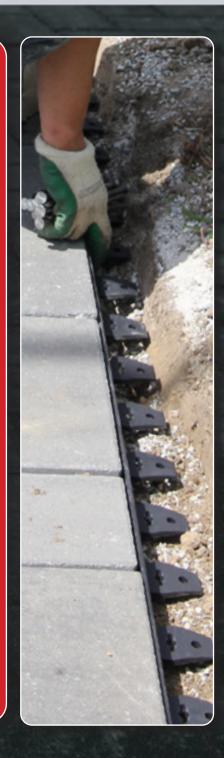

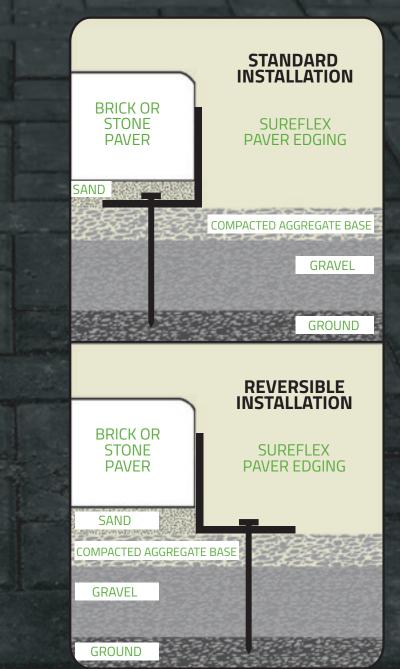

INSTALLATION TIPS:

Driveways: Nail every 8" (20.3 cm) to 12" (30.5 cm). Use Standard Installation Only.

Walkways and Patios: Nail every 16" (40.6 cm) to 20" (50.8 cm) & at either end. Use Standard or Reversible installation.

SPECS:

Length: 7' 6" (228.60 cm) Height: 1.75" (4.445 cm) Thickness: .31" (7.874 mm)




VIDEO LINK



- What the professionals use and easy for the "Do-it-yourself-er" to install.
- Heavy duty construction: will not become brittl to weathering and lasts a lifetime.
- Comes in straight form but can easily be worke with for curved applications/corners.
- Tool-less to do curves, corners or straights.
- Can be installed both standard or reverse installation.
- Low profile so the edge is invisible when properly installed.
- No wasted material due to overlap at joints.
- Comes with plated joiner tabs.
- Made from 100% recycled material and comes with karma!





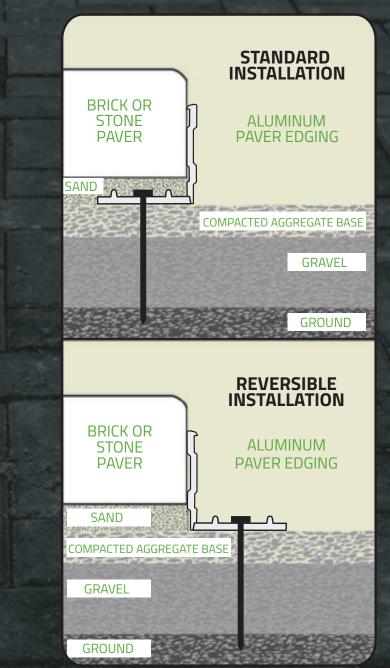

INSTALLATION TIPS:

Driveways: Nail every 8" (20.3 cm) to 12" (30.5 cm). Use Standard Installation Only.




/IDEO LINK

Walkways and Patios: Nail every 16" (40.6 cm) to 20" (50.8 cm) & at either end. Use Standard or Reversible installation.

SPECS:

Length: 8' 4" (254 cm) Height: 1.5" (3.81 cm) Thickness: .125" (3.175 mm)





Our Lowest Profile Aluminum Edging is ideal for use with 20mm porcelain pavers, flagstone, wetcast shapes and bluestone. Our aluminum edging bends to your needs no matter how complex your design requirements. Made of aluminum, it's strong enough for straight lines, yet flexible enough to follow the most intricate curved patterns.

- Convenient 8' 4" lengths
- Made of non-rusting Aluminum
- Completely hidden from view
- One piece for straight or curved patterns
- 90 degree angles without cutting
- Will not warp in heat or crack in cold
- No loss of material due to overlap at joints
- Made from 100% recycled material and comes with karma!

Length: 8' 4" (2.54m) Height: 5/8" (17mm) Thickness: 0.125" (3.2mm) Flange: 1.5" x 4" (35mm x 102mm) Alloy: 6063 aluminum T-5 hardness US Patent





Professional Grade Garden Edge Convenient and Straight 8' Lengths, no more rolls! 100% Recycled Material & Comes With Karma! &

PLIATINUM EDGE



Durable corrugated side wall construction with T-Shape flange allows for easy and secure installation.

*NOTE - CONNECTORS ARE REQUIRED

PRIMO EDGE



Primo Edge was developed to offer quality and performance at an economical price.

*NOTE - CONNECTORS ARE REQUIRED

SIMPLE EDGE



Patented design eliminates the need of a garden edger. It's one time installation inhibits grass from growing onto walkways and concrete driveways, making this product Eco Friendly and a true time saver.

Anchor Stakes 9" x 1" Galvanized Steel 100 pcs per case


Straight Connector

100 pcs per case

90° Corner Connector Durable Injection Mold 25 pcs per case



- Keyhole Interlocking System: Lengths are easily and quickly connected.
- Superior Reinforcement 8 ft lengths: Rigid enough to provide perfectly straight lines; flexible enough for the most demanding curves.
- No need to use heavier gauge or more costly material to maintain straight runs.
- Heavy duty 1 1/8" nail loops located every 23": allows for more frequent nailing positions, providing superior anchoring where required.
- Steel Nail Anchoring: Spiral 10" nails readily available.
- 100% Recycled Material & comes with Karma! 45

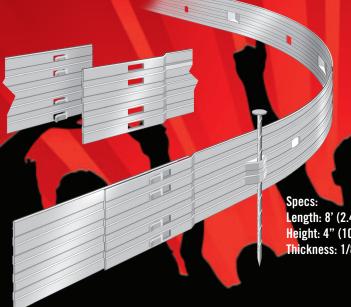

Length: 8' (2.43m) Height: 4" (10.1cm) Thickness: 1/8" (3.2mm)






Works on wet & frozen surfaces!! Don't believe us? Ask for a sample!!

- Quick adhesion and fast drying
- Works on concrete, brick, wood, metal, stone and fibreglass
- Works in all temperatures
- Premium Polyurethane
- VOC compliant
- Ideal for artificial turf
- Guaranteed to satisfy the highest of demands





10.5 oz 24 tubes per case 60 cases / 1440 tubes per pallet



12 tubes per case 60 cases / 720 tubes per pallet

••••••• 13






Features:

- Extremely bright
- Inverted tip
- Quick drying won't clog
- Water based safe on plants and grass
- Lead free
- 17 oz can / 12 per case

Colors Available:

- Fluorescent Orange
- Fluorescent Red
- Hot Pink 🐐
- White 🕏

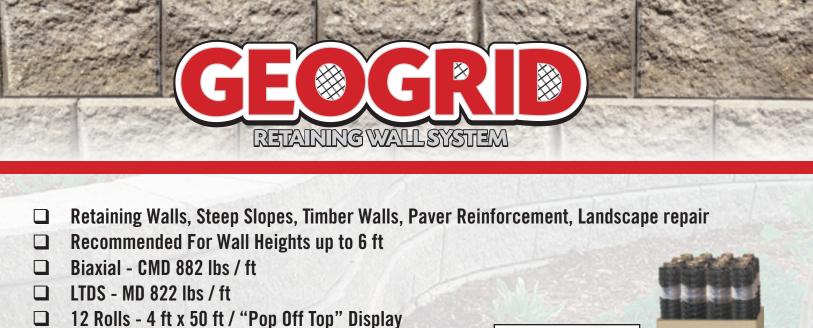

Other Sizes:

Geo Grid 150 - 6' x 150' Roll - 45 lbs - 100 SQ. YDS Geo Grid 200 - 6' x 300' Roll - 110 lbs - 200 SQ. YDS Geo Grid 350 - 6' x 300' Roll - 130 lbs - 200 SQ. YDS








- Designed for all 3" 8" blocks.
- Easy installation
- Esthetically pleasing
- Reduced labour costs / No more cutting holes
- · Height easily modified for use with any size block or timber
- Male end snaps into 4" TEE
- Case pack 12 pcs
- Available in Black, Grey or Beige






- □ Load bearing up to 8,000 psi
- U Weatherproof and will not rot, shrink, warp or split
- **Easy break off points, amazing support and easy way to align**
- UV treated so it will not become brittle
- **Recommended for pavers, retaining wall caps, masonry, concrete and many other uses**
- □ Injection molded sheets of 10 / 36 sheets per case

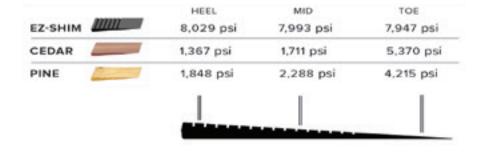







BLACK: SWD-BL **GREY:** SWD-GR BEIGE: SWD-BE













ALL HAMMERS CARRY A LIFETIME WARRANTY!!

Paver Mallet STH-416

Perfect for Large Wall Projects

- 13" Hickory Wood Handle
- Cast Iron Head Casting
- 2^{3/8}" (60mm) Changeable Inserts
- Overall Length 16"

Inserts included:

3.5 Lbs STH-416A: Black - Composite Rubber/Medium Hard

STH-416B: Red - Plastic/Hard

STH-416C - Blue (Non-Marring) - Soft



Baseplex Paver Mallet STH-417

The Universal Hammer

- Ash Wood Handle
- Zinc Die Cast Head
- 2" (50mm) Changeable Inserts
- Overall Length 13.25"

Inserts included:

STH-417A:White - Nylon/Hard

STH-417B: Red - Plastic/Hard **STH-418**

Sledge Mallet

The Ultimate Sledge Mallet

- 31" Hickory Wood Handle
- 7lb Cast Iron Head Casting
- 3^{1/8}" (80mm) Changeable Inserts
- Overall Length 31.4"

Inserts included:

7.4 Lbs

STH-418A: Black - Composite Rubber/Medium Hard

STH-418B:White - Superplastic/Medium Hard

Wall Paver Mallet **STH-419**

Ideal for Retaining Wall Cap/Stones

- 19" Hickory Wood Handle
- Cast Iron Head Casting
- 3^{1/8}" (80mm) Changeable Inserts
- Overall Length 19.25"
- 6.6 Lbs

1.6 Lbs

Inserts included:

STH-419A: Black - Composite Rubber/Medium Hard STH-419B:White - Nylon/Hard

Dead Blow 40mm: STH-420 70mm: STH-421

- The Only Dead Blow to use
 - Hickory Wood Handle
 - Two white nylon changeable inserts
 - Overall Length 4" (40mm) 4.5" (70mm)

Inserts included:

STH-420A:White - Nylon/Hard STH-421A:White - Nylon/Hard





5.5 Lbs



ALL HAMMERS CARRY A LIFETIME WARRANTY!!



Problem Solver Brick Hammer STH-429

- II" Total Length
- I" Face DiameterQuality Forged Steel
- Anti-Vibration Grip
- Unique "Toothed" Brick Hammer Design
 I.32 Lbs Total Weight



Black Giant Brick Hammer STH-430

- II" Total LengthQuality Forged Steel
- Anti-Vibration Grip
- 1.32 Lbs Total Weight



Stone Sledge STH-431

- 10.6" Total Length
- Black Powdered Coated, Corrosion-Resistant Head
- Made from special hardened and tempered PICARD steel
- Slightly Curved FaceDual Curved Ash Handle
- 2.75 Lbs Total Weight



Long Handle Stone Sledge STH-432

- 31.4" Total Length
- Black Powdered Coated, Corrosion-Resistant Head
- Made from special hardened and tempered PICARD steel
- Ash Handle
- Slightly Curved Face
- I I Lbs Total Weight

UREFOOT HARDSCAPE PRODUCTS INC.

ACCESSORIES AND TOOLS



STH-411 Deluxe Paver Persuader

Galvanized steel handle / Angled rubber head • Weight - 8 lbs • 36" Handle 7 Year Warranty - Except Pads

STH-414 Dead Blow 4 lbs.

Case of 12





STH-412 Double Headed Paver Mallet

Galvanized steel handle / Flat rubber head • Weight - 5.5 lbs • 15" Handle

- 7 Year Warranty Except Pads

STH-415 Rubber Mallet

32 oz. Case of 24





- Attaches to many different plate compactors with its universal size of 19" wide x 24" long x 0.25" thick. Flexible front lip.
- Mat includes I pair universal aluminum mounting brackets.
- Allows for a quick attachment at any point during a project without slowing down the job.
- Keeps the travel speed and compaction force you need when making that critical final pass over the pavers and poly sand.
- Lasts for a long time because it has a high abrasion resistance and low coefficient of friction.
- May be cut down to small sizes.

PW-1580 Clear Pallet Stretch Wrap Aluminum Aluminum · Ideal for all Stoneyard material SSR-210 Screed Rail SSR-211 Screed Bar • Durable film resists punctures for increased load retention · Clear film to keep your wrapped products visible • Cast hand wrap, 2-sided cling • 15" x 1500' x 80 gauge 4' Lightweight I" x 8' • 4 Rolls per case 6' 0.25" Diameter Super Light • 48 Cases per pallet 8' Hollow I" x 4"

EZ Screed Machine – SSR-212

A faster way to get the job done and accomplish a perfectly level surface. The EZ Screed Machine is expandable to cover surfaces from 30" to 48" wide. Efficient spreading and screeding tool for multi applications. Upright handle will help save your back and knees when spreading bedding materials.

- Weight: 46.3 lbs
- Handle height: 55.1"
- Handle length: 51.1"
- Min. width setting: 29.2"
- Surface Treatment: Powder Coated Yellow Product dimensions: 28.8 x 19.7 x 15.8 inches
- Wheel: 9.8"
- Warranty: 7 years, except wear parts
- Max. width setting: 48.8"

VIDEO I INK







SCL-211 3" SCL-212 4"



SCL-213 3" / 1.8 LBS SCL-214 4" / 2.4 LBS

- 3.14" Width
- Black Powder Coated, Corrosion-Resistant
- Tapered
- · For stone working, beating silts or patterns in soft stone
- Also suitable for Natural Stone

Paver Aligning Bar – SPB-312

Useful and strong device to adjust blocks. The knife is hardened. The body can stay upright during use of the spacing.

- Weight: 5.3 lbs Length: 39.4"
- Surface Treatment: Powder Coated Yellow
- Product dimensions: 39.8 x 15.8 x 7 inches

Warranty: 7 years, except wear parts



STG-241 Economy Knit

PICARD

Rubber/Latex Coated Palm Available by the Dozen. Case packs only. XL Only



MADE

RMANY

IN

Caulking Guns

SLR-48

Heavy Duty Construction STC-221 9" Case Pack 24 STC-222 13" Case Pack 12



Stiff Bristle / Exterior Broom 18" **SLB-18** 24" **SLB-24**

Landscaping / Grading Rake · All aluminum **SLR-36** 36"

48"

- construction
- Won't rust

HARDSCAPE PRODUCTS INC.

LIFTING EQUIPMENT





- Range 1/2" 16.5"
- Max Weight 1200 lbs *7 Year Warranty - *Except Wearing Parts

Two handles also allowing for a two-man manual operation.

• Weight - 28 lbs • Depth - 5.5



Cartman EZ Paver/Slab Lifter SPB-315

The Cartman EZ Paver/Slab Lifter is the perfect device for paving slabs. You can transport slabs from 11.8"- 23.6" with a max. weight of 176 Lbs. The compact dimensions and wheelbase guarantee easy turning and the ability to get into tight spaces. Upright handle and the two pneumatic tires make this lifter a pleasure to handle.

- Weight: 33.1 lbs
- Clamping depth: 1.5"
- Max. load: 176 lbs
- Min. width setting: 11.8"
- Max. width setting: 23.6"
- Surface Treatment: Powdercoated yellow
- Product dimensions: 53.2 x 22.4 x 11 inches
- Tire pressure: 36ppi

Warranty: 7 years, except wear parts







Big Mouth Paver/Slab Lifter SPB-317

Put away your screwdrivers when trying to extract pavers. This lifter is designed to extract pavers from 4" to 12.5" and is a real time saver.

- Weight: I I lbs
- Min. width setting: 4"
- Max. width setting: 12.5"
- Surface Treatment: Galvanized
- Product dimensions: 20" x 12" x 28"

Warranty: 7 years, except wear parts







HARDSCAPE PRODUCTS INC.

FO

VIDEO LINK

LIFTING EQUIPMENT

EZ Paver/Slab One Hand Lifter SPB-316

Ideal tool for lifting plates without bending. The ergonomic way of transporting slabs. This tool is not designed for mechanical lifting.

- Weight: 5.8 lbs
- Max. load: 132.2 lbs
- Min. width setting: 7.9"
- Max. width setting: 24'
- Surface Treatment: Powder Coated Yellow
- Product dimensions: 20.5 x 7.9 x 4.3
- Warranty: 7 years, except wear parts





Octopus Lifting Clamp STH-434

Suitable for handling steps, curbs, L-stones, etc. with a lifting device. Easily adjustable quick spring bolt opening. Curved curb stones are also gripped securely, as the gripper has an inside height of 7" enabling grip from underneath. Automatically opens upon release.

- Weight: 73 lbs
- Clamping depth: 7.4"
- Max. load: 1322 lbs
- Min. width setting: 1.9"
- Max. width setting: 23.5"
- Surface Treatment: Powder Coated Yellow
- Product dimensions: 26" x 23" x 33"
- Warranty: 7 years, except wear parts













GRABO Pro 2.0





Kit Includes:

GRABO Pro-Lifter comes as a complete unit, with pre-installed battery and vacuum seal.

That is not all. There are other accessories in the kit, including a multi-socket charger and a heavy duty carry bag. The complete kit is packaged in a functionally design colourful box.



Package Contents:

- I GRABO Pro Tool (2021 Model with digital display)
- I Multi-socket charger
- I Battery (preinstalled on the tool)
- I Seal (preinstalled on the tool)
- I Tough Oxford fabric carry bag
- · Operator's manual in English

GRABO Pro 2.0 Weight lifting safety parameters

| | Material / Direction | Glass | Ceramic tiles | Metal | Plastic | wood | Rough Slate | Rough Concrete | Dry Wall |
|---|-------------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------------------|--------------------|--------------------|
| - | PERPENDICULAR HOLD | 375 Lbs (170 kg) | 375 Lbs (170 kg) | 242 Lbs (110 kg) | 220 Lbs (100 kg) | 220 Lbs (100 kg) | 176 Lbs (80 kg) | 76 Lbs (80 kg) | 165 Lbs (75 kg) |
| - | PARALLEL HOLD | 265 Lbs (120 kg) | 265 Lbs (120 kg) | 242 Lbs (110 kg) | 220 Lbs (100 kg) | 143 Lbs (65 kg) | 176 Lbs (80 kg) | 176 Lbs (80 kg) | 143 Lbs (65 kg) |



ERGUO SI Attachment Ergonomically designed attchment allows the worker to operate the GRABO tool without bending.





High-capacity battery A full battery charge delivers up to 900 operating cycles or 1.5 hours of uninterrupted run time. Can be used with all models except GRABO H.



Extra Seals Replacements for worn seals with diminished lifting capacity. Patented high friction foam-rubber seal fits all GRABO models.



RockSeal™

New seal system that fits all GRABO models, including Nemo GRABO, GRABO Pro-lifter 2.0, RTC tools Grabo, FXAH-120 Probst GRABO, Topspin Powertools GRABO and other co-branded units. This patented seal is designed specifically for extremely rough stone and rock suffaces with up to 10mm surface profile.



Fairport Block & Paver Splitter FBS 40

Designed for splitting:

- Retaining Wall
- Cap Stone
- Rough Cut Face Stone
- Paving Stones
- Granite and most other flat stone materials on the market today
- Spring loaded tray for angled "undercuts" when cutting pavers.

Easy one dial system: For perfect cuts every time (No need to set screw every time when cutting same size stone)

Great cutting range: Cutting width: 16" Cutting height: 8.3" Weight: 135 lbs



Fairport Hydraulic Block & Brick Splitter FBS 60 Designed for splitting: Retaining walls • Cap stone **VIDEO LINK** • Rough cut face stone • Granite • Paving stones - and most other flat stone materials on the market today • Over 20 ton cutting force • Spring loafedd tray for angled "undercuts" when cutting pavers • Adjustable blade height for all "flat faced" products up to 235 mm • Cutting width; 25.6" • Cutting height: 9.25" 22 fairport ₹., • Length: 28.74" building on quality • Width: 32.38" • Height: 40.95" • Weight: 218.26 lbs



20,000 Hour Lifespan

Energy Efficient - 1.9 Power Watt That Emits "Warm" Light 30 SMD High Output LED's Per Fixture 5 Year Warranty (When Used With Approved DC Transformer) Waterproof Design - 1P66 Rating* UV Treated Polycarbonate Lens - Will Not Brown Or Yellow Quick And Easy Installation - Comes With 6ft Lead Wire 30 Year Warranty On Corrosion Resistant Powder Coated Finish Heavy Duty Die Cast Aluminum Body

Dimensions:

7.75" Wide x .75" Tall x 1" Deep



Available Colours:





•Bronze Sparkle

•Matte Black



•Classic Brown



NTE ON



BOTTOM

PAVER SPOT

PAVER SPOT

- Waterproof and submersible
- Energy efficient and emits a "warm" light with a durable polycarbonate shell
- Suitable for driveways, walkways, steps, decks, docks and more
- 10 year warranty, 100,000 hour rated
- 1.5 Watts, 1" Diameter, Height 5/8", 6' lead wire

Available in 4 spot packs or complete kit (contains 8 spots, 60 Watt Transformer, Timer, Gel Caps)

DC TRANSFORMERS

- 36, 60, 100 watt versions
- DC specific constant even power supply
- 3 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated

AC TRANSFORMERS

- 60 and 100 watt versions
- 5 year warranty
- Waterproof (IP66) suitable for indoor or outdoor use
- Over voltage and thermal protection
- UL and ETL Safety rated
- Built in photocell / timer

PHOTOCELL TIMER

- Indoor or Outdoor use
- Multiple time on/off settings
- 1 yr warranty
- Photo activated for hassle free on/off

LOW VOLTAGE WIRE

• Outdoor Rated, UL approved

16 Gauge Wire - 100' rolls - Suitable for runs over 75'

OUTDOOR GEL WIRE NUTS

- UL approved
- 10 per pack











- 6 led x 20 lm per led = 120 lumen
- Wattage 2 Watts
- Warm White: 2725 ± 70 °K
- Wire length: 1.5 m (4' 11")
- cETL
- 12V AC/DC
- Fully assembled units available in Black and Grey
- Dimensions 6^{7/8}" wide x 3/4" tall x 1" deep





- Voltage 12V AC/DC
- Wattage 0.4W
- # of LEDs 6
- Beam degree 90°
- Frosted Lens
- Brushed Nickel metal trim
- Color Temperature : 2725 ± 70 °K
- Dimensions 1.25 x H.73in (30.5x H18.5mm)
- Lumens 25
- IP Rating 66 Indoor/Outdoor
- Certification cETLus



ME/NR








High Power, Adjustable Accent Light

- Includes: 17W, 1100 lumens, 3000K
- Power can be dialed down to 3W, 250 lumens
- 20° to 60° adjustable beamspread
- Humidity evacuation system
- IP65
- Includes a 12" aluminum spike
- Louver included
- Rugged brass construction
- Bulb Included
- 5 year warranty



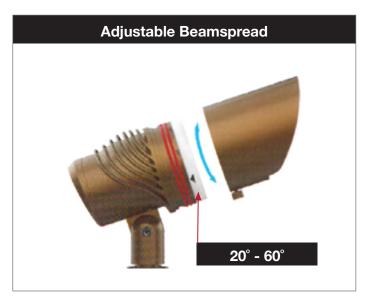

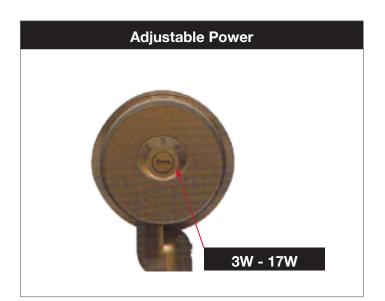

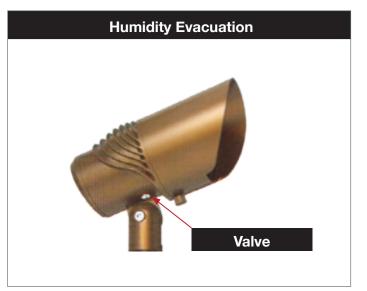



MR16



- Sturdy brass MR16 accent light
- Angled glare shield length adjustable from 130 mm to 155 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- Stake included
- Lamp not included. See page 28 for a selection of MR16.
- 5 year warranty

80 mm

MR08



- Sturdy brass MR08 accent light
- Angled glare shield length adjustable from 80 mm to 110 mm
- No tools required to relamp, aim the luminaire or adjust the glare shield.
- Stake included
- Lamp not included. See page 28 for a selection of MR08.
- 5 year warranty

- Sturdy brass mini flood
- 2.5W, 3000°K, LED bi-pin already installed in the fixture


Bi-pin Flood

50 mm

2"

95 mm 3.75"

- G4 socket
- Stake Included
- Bulb Included
- 5 year warranty

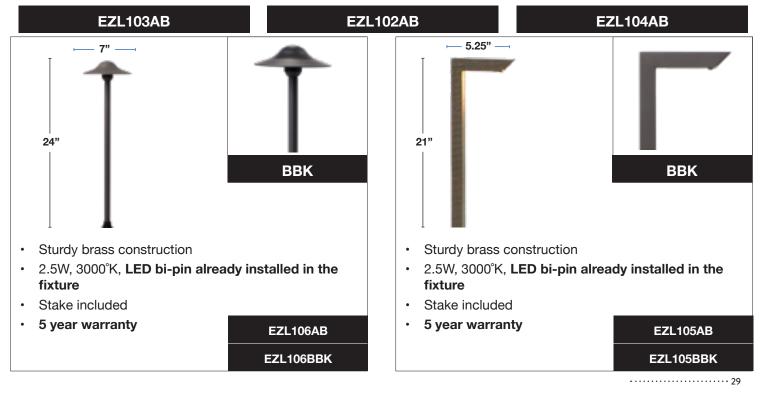







- Angled Glare Shield •
- Stake Included .
- Lamp not included. See page • 28 for a selection of MR16.
- 5 year warranty ٠

| EZL101BZ | |
|----------|--|
| EZL101BK | |
| | |





5 year warranty



Transformer: 75W


- 75W Transformer
- Sturdy stainless steel built
- Output taps: 12 and 15 Volts
- Built-in mechanical timer and photocell plug
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- Thermal protection with auto-reset on the primary side
- Secondary side magnetic circuit breaker
- . Drop down bottom
- 10 year warranty



150W Model

Transformer : 150W, 300W & 600W

- Sturdy stainless steel built
- Output taps: 12, 13, 14 and 15 Volts
- Timer and photocell plugs
- Room for most commonly used timers
- Removable, lockable hinged door
- Large, robust terminal block
- Drop down bottom .
- Epoxy encapsulated toroid coils for higher efficiency and lower heat generation
- Thermal protection with auto-reset on the primary side and secondary side . magnetic circuit breaker
- Multiple knockouts
- 10 year warranty




| Deut # | | Dime | ensions | Tara | |
|---------|-------|------|---------|------|-----------------|
| Part # | Watts | а | b | С | Taps |
| EZLT7a5 | 75 | 170 | 110 | 115 | 12 & 15 |
| EZLT150 | 150 | 295 | 153 | 140 | 12, 13, 14 & 15 |
| EZLT300 | 300 | 325 | 155 | 140 | 12, 13, 14 & 15 |
| EZLT600 | 600 | 365 | 170 | 170 | 12, 13, 14 & 15 |

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|-------|-------|------------|-----------|------------|--------|--------|-----|-----------|-------|
| MR16 | GU5.3 | 12 | EZL219 | 4 | 30° | 3000°K | 310 | 80+ | 25 000 | 50 mm |
| | Hu. | | EZL220 | 4 | 45° | 3000°K | 310 | 80+ | 25 000 | 50 mm |
| | E | | EZL221 | 4 | 60° | 3000°K | 310 | 80+ | 25 000 | 50 mm |
| -30 | 620 | | FC • 5 yea | ar warraı | nty | | | | | |

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|-------|-------|-----------|-------|------------|--------|--------|-----|-----------|-------|
| MR16 | GU5.3 | 12 | EZL240 | 7 | 45° | 3000°K | 475 | 80+ | 25 000 | 50 mm |
| | and a | | | | | | | | | |





| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|----------|------|-------|-----------|-------|------------|--------|--------|-----|-----------|-------|
| MR08 | GU4 | 12 | EZL201 | 2.5 | 30° | 3000°K | 160 | 80+ | 25 000 | 36 mm |
| MR08 G04 | | | EZL202 | 2.5 | 80° | 3000°K | 160 | 80+ | 25 000 | 36 mm |

FC • 5 year warranty

| | Louver | | | | | | | | | |
|--------|--------|----------|-------|---------|--|--|--|--|--|--|
| Part # | Source | Cell Dia | Depth | Cut-Off | | | | | | |
| EZR16 | MR16 | 1⁄4" | .235" | 45° | | | | | | |

| Lamp | Base | Volts | Product # | Watts | Beamspread | Color | Lumens | CRI | Avg. Life | MOL |
|------|------|-------|-----------|-------|------------|--------|--------|-----|-----------|-------|
| Т3 | GU4 | 12 | EZL301 | 2.5 | 360° | 3000°K | 250 | 80+ | 25 000 | 32 mm |
| | | 0 | | | | | | | | |





UREFOOT

HARDSCAPE PRODUCTS INC.

1.877.442.4457 WWW.SUREFOOTEDGING.COM INFO@SUREFOOTEDGING.COM Follow us on:

